

▲ Optional: Electronic gluing system



▲ Optional: Bump&Turn system



Intelligent modular design, flexible & diverse, can run complexed boxes in one pass.

PC: Suitable for straight-line, crash-lock bottom & double wall boxes.


SL: Suitable for straight-line, crash-lock bottom, double wall, 4 & 6-corner boxes.

Intelligent modular design, flexible & diverse, can run complexed boxes in one pass.

Box types	650	800	1100
<p>Straight-line box</p>	A: 136 - 650 mm B: 100 - 500 mm E: 65 - 320 mm	A: 136 - 780 mm B: 100 - 800 mm E: 68 - 380 mm	A: 136 - 1080 mm B: 100 - 800 mm E: 68 - 530 mm
<p>Crash-lock bottom box</p>	A: 146 - 650 mm B: 110 - 500 mm E: 68 - 320 mm	A: 146 - 750 mm B: 110 - 800 mm E: 68 - 368 mm	A: 146 - 1050 mm B: 110 - 800 mm E: 68 - 518 mm
<p>Double-wall box</p>	A: 200 - 650 mm B: 100 - 500 mm D: 30 - 150 mm E: 80 - 400 mm	A: 200 - 800 mm B: 100 - 800 mm D: 30 - 150 mm E: 80 - 680 mm	A: 200 - 1100 mm B: 100 - 800 mm D: 30 - 150 mm E: 80 - 980 mm
<p>4-corner box</p>		A: 160 - 750 mm B: 140 - 800 mm H: 25 - 120 mm	A: 140 - 1050 mm B: 140 - 800 mm H: 25 - 120 mm
<p>4-corner box with lid</p>		A: 250 - 720 mm B: 140 - 800 mm H: 25 - 120 mm	A: 250 - 1020 mm B: 140 - 800 mm H: 25 - 120 mm
<p>6-corner box</p>		A: 250 - 720 mm B: 140 - 800 mm H: 25 - 120 mm	A: 250 - 1020 mm B: 140 - 800 mm H: 25 - 120 mm

Specification SMARTFOLD

	650	800	1100
Material	200-800 g/m ²	200-800 g/m ²	200-800 g/m ²
Corrugated type	N,E&F	N,E&F	N,E&F
Speed	400 m/min	400 m/min	400 m/min
Glue type	Water-based	Water-based	Water-based
Blank width	126-650 mm	126-800 mm	126-1100 mm
Installation		PC SL	PC SL
Length	13.7 m	15.92 m 15.92 m	15.92 m 15.92 m
Width	1.29 m	1.65 m 1.66 m	1.83 m 1.86 m
Height	1.3 m	1.4 m 1.4 m	1.4 m 1.4 m
Weight	6.5 Ton	7.2 Ton 7.5 Ton	7.8 Ton 8 Ton
Power supply	17 kW	22 kW 28 kW	22 kW 28 kW
Air compressor capacity	10 m ³ /h	10 m ³ /h 10 m ³ /h	10 m ³ /h 10 m ³ /h

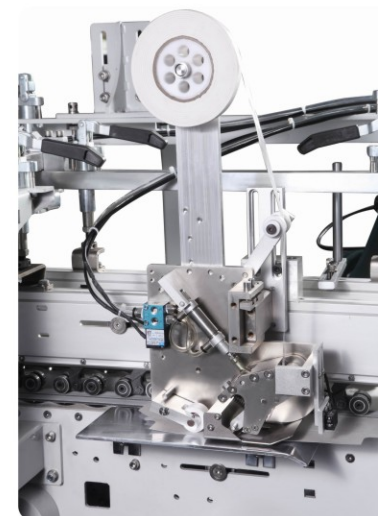

▲ Optional: Double side tape applicator